

# DIGITUS® Komunikacijski ormar Dynamic Basic - 600x800 mm (ŠxD)

DN-19 22U-6/8-D

EAN 4016032336471



## ORMAR 22U 60/80 DN19-22 STOJ-D 1155x600x800 mm, color grey (RAL 7035)

Dynamic Basic komunikacijski ormari dizajnirani su i proizvedeni za ugradnju i ožičenje aktivne i pasivne mrežne opreme. S nekoliko optimizacija možete osigurati savršen odnos kvalitete i dodane vrijednosti. Svaki ormar ima čvrstu konstrukciju, jednostavan je za uporabu i estetski prihvatljiv svakom prostoru. Prednja vrata izrađena su od bočnih metalnih profila sa sigurnosnim staklom. Svi bočni paneli kao i stražnji panel mogu se zaključati i ukloniti po potrebi. Svaki ormar je opremljen s galvaniziranim 483 mm (19") šinama koje su montirane s lijeve i desne strane, s prednje i sa stražnje strane ormara. Mogu se prilagoditi po dubini i na njima se nalaze oznake visine po broju unita. Krov je pripremljen za ugradnju ventilatorskih jedinica. Svi Dynamic Basic komunikacijski ormari isporučeni su kompletno sastavljeni. Dostupni su u različitim visinama od 22U do 47U i širine od 600 ili 800 mm, dubine od 600 do 800 mm. Dolaze u standardnim bojama, sivoj (RAL 7035) i crnoj (RAL 9005). Ostale boje dostupne su na zahtjev.

### The DIGITUS® Dynamic Basic series has been manufactured, designed and developed to meet the high demands of IT infrastructure

- Protection class IP20
- Front door made of metal side struts with safety glass
- Locking system with swivel lever handle on front door
- 120° door opening angle
- 1-point locking on the front door
- Rear and side panels are lockable and removable
- Incl. 4 levelling feet, enclosed
- 483 mm (19") profile rails mounted at the front and rear inside the enclosure, galvanized

- 483 mm (19") profile rails are adjustable in depth and marked with the height unit
- Base with punched cable inlet, covered with screwed plate
- Die-cut cable inlets with plastic cover in the roof
- Roof is prepared to accommodate a fan element (punched-out mounts)
- Various earthing points in the enclosure for built-in components
- Incl. installation set (screws, cage nuts, washers)
- Supplied fully assembled
- Installation depth for components min. - max.: 430-750 mm

#### Attributes


- Bočne ploče: Obje strane
- Boja: svijetlo siva, RAL 7035
- Dubina: 800 mm
- Jedinice: 22
- Kapacitet opterećenja: 600 kg
- Prednja vrata: Staklena vrata, jednostruko otvaranje
- Širina: 600 mm
- Stražnja vrata: Stražnja ploča s bravom, odvojiva
- Vrsta ormara: Mrežni ormar
- IP klasa zaštite: IP20
- Montirano: Da

#### Package contents

- Earthing cable set
- Installation set (screws, cage nuts, washers)
- 2 x key

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	44.00	85.00	65.00	120.50	665,762.00
Packaging Unit Inside	1	44.00	85.00	65.00	120.50	665,762.00
Packaging Unit Single	1	44.00	85.00	65.00	120.50	665,762.00
Net single without Packaging	0	43.00	80.00	60.00	115.50	554.40

**More images:**

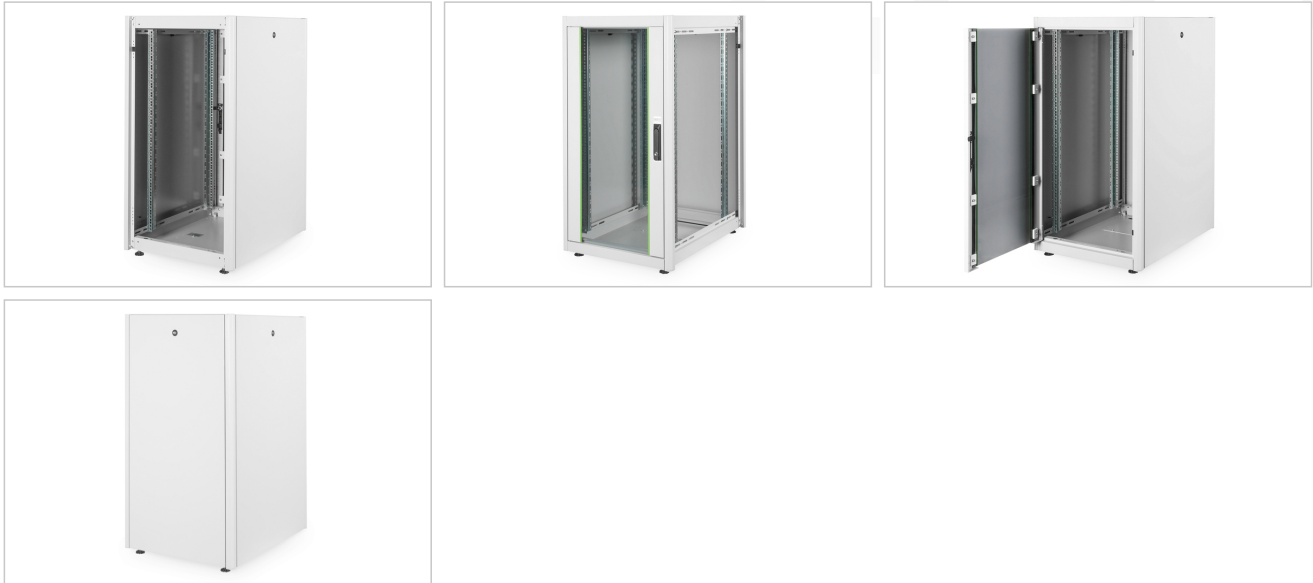

**Safety notes**

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be neatly routed and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)