

DIGITUS Zidna utičnica (FTTH) za 2x SC simplex/LC duplex

DN-931087

EAN 4016032368045

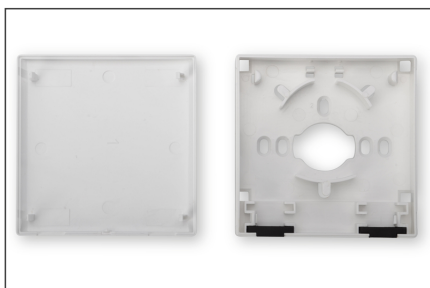
**KUČIŠTE NŽ (FTTH) za 2xSC Simplex/LC Duplex 2x splice holder, 19x86x86mm, grey (RAL 7035)**

Artikl DN-931087 iz DIGITUS® Professional ponude zidna je utičnica koja je dizajnirana za upotrebu u kućanstvu i komercijalnim zgradama (FTTH) za spajanje do 2 optičke niti. Instalacija je brza i jednostavna.

DIGITUS® Optical Termination Boxes are made for high demand IT-Infrastructure Solutions - designed and developed on highest standards.

- Compact & economic design
- Allows cable entry from both sides
- Removeable cover for easy access
- Wall mounting
- Dimensions (HxWxD): 19x86x86 mm
- Cable ports: 4 cable ports (for cables with max. diameter of 5 mm)
- Capacity: 2 splices
- Adapter capacity: 2x SC Simplex/LC Duplex

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	200	14.50	50.00	41.00	32.00	65.60
Packaging Unit Inside	25	1.81	20.00	28.00	10.00	5.60
Packaging Unit Single	1	0.07	8.90	8.90	1.90	150,499.00
Net single without Packaging	0	0.07	8.90	8.90	1.90	150,499.00

More images:**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com