

DIGITUS® USB-C connection cable, USB 3.2 Gen2, USB-A to USB-C

AK-300146-010-S

EAN 4016032438298



USB Type-C connection cable, type USB-A to USB-C M/M, 1.0m, Gen2, 5V3A, 15W, 10GB, 3.2 Version, bl

For connecting external USB devices (with C socket, e.g. PC, tablet or smartphone) to the USB host (e.g. PC, notebook). Data transfer rate up to 10 Gbit/s (Superspeed+).

For super-fast synchronization and charging

- SuperSpeed+ data transfers up to 10 Gbit/s - 20 times faster than USB 2.0
- Supports up to 5V3A, 15W power supply
- Supports the USB PD (Power delivery) specification.
- Type C plug can be used on both sides
- Backwards compatible with USB 2.0 and 1.1


Attributes

- Ambalaža: Polybag
- Asortiman: USB kabeli
- AWG: 24/28
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: USB C, utikač
- Konektor 2: USB A, utikač
- Konektor u boji: crni
- Materijal žice: CU
- Površina konektora: poniklano
- Duljina: 1 m
- oklop: dvostruki oklop
- USB-C proizvodi: Da

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	200	10.00	32.00	50.00	21.00	33.60
Packaging Unit Inside	10	0.50	20.00	30.00	7.00	4.20
Packaging Unit Single	1	0.05	24.00	13.00	5.00	1.56
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:

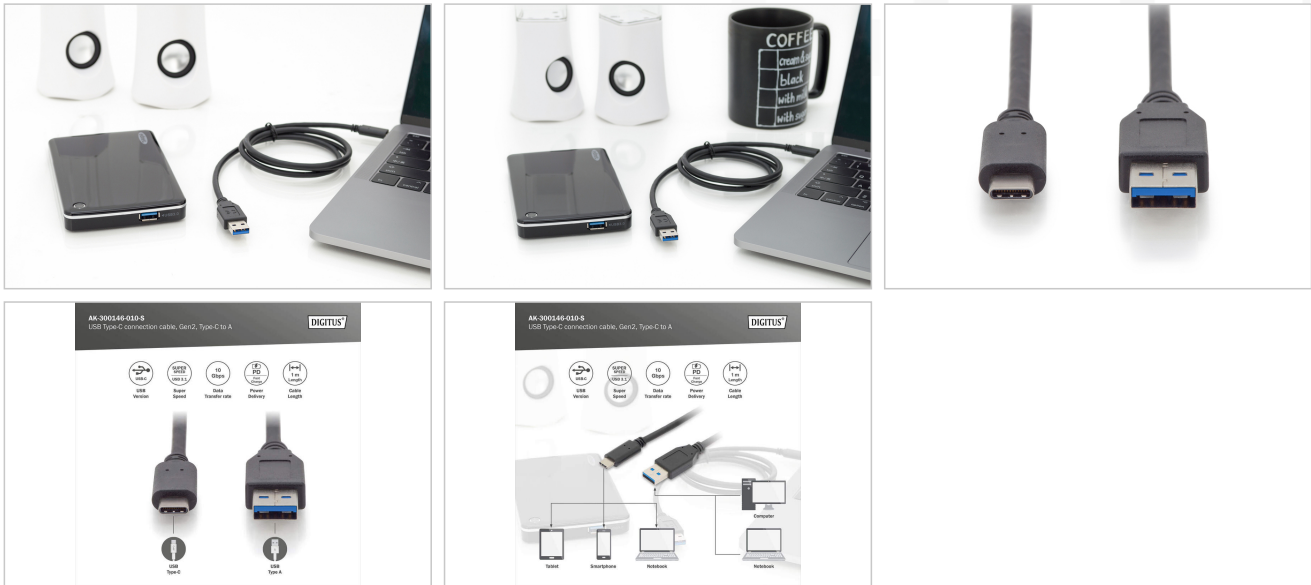

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com