

# DIGITUS® USB-C 3.2 Gen2 adapter / converter cable, USB-C - DP

AK-300333-020-S  
EAN 4016032451365



**USB Type-C adapter cable, Type-C to DP M/M, 2.0m, 4K/60Hz, 32,4 GB, bl, gold**

The USB Type-C 4K DP adapter/converter cable enables the direct connection of a TV, monitor or projector to a USB-C device. The adapter/converter cable is a must-have accessory, whether you are connecting your notebook to a TV at home or using a DisplayPort projector for presentations at work.

**Connect your USB-C device directly to a monitor, TV or projector - you don't need an additional adapter.**

- Your USB-C equipped device must support video mode (DP Alt Mode) to be compatible with this adapter / converter cable.
- The video output capability depends on the graphics card of your notebook and the connected monitor. Some monitors also limit the available resolution.


- Supports up to 4K/2K with 60Hz
- Support for digital audio transmission in stereo
- Data transfer rate up to 32.4 Gbit/s

**Attributes**

- AWG: 26
- Feritni filter: nema
- Kabel u boji: crni
- Konektor 1: USB C, utikač
- Konektor 2: DP, utikač
- Površina konektora: poniklano
- USB sukladnost: USB 3.0 / 3.1
- Duljina: 2 m
- oklop: dvostruki oklop

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	40	9.40	35.00	26.00	24.00	21.84
Packaging Unit Inside	10	2.35	17.00	30.00	25.00	12.75
Packaging Unit Single	1	0.24	17.00	3.00	25.00	1.28
Net single without Packaging	0	0.10	15.00	3.00	14.00	630.00

**More images:**

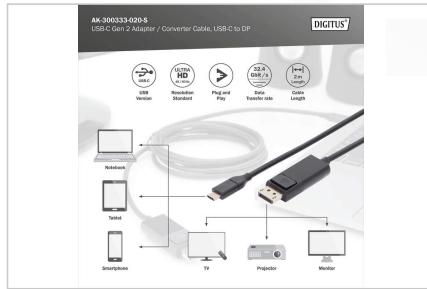

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)