

DIGITUS® USB-C - HDMI video adapter cable, UHD 4K / 30 Hz

DA-70821

EAN 4016032465072



USB-C - HDMI Adapter, 1.8 m 4K/30Hz, black, metal housing

The USB-C to HDMI adapter cable from DIGITUS® allows you to connect a monitor, projector or TV to the USB-C port on your notebook or tablet. No additional adapters are required. Depending on the source device, this cable supports resolutions of up to 4K / 30 Hz incl. 3D and ARC support. Data transfer rates of up to 5 Gbps and USB 3.1 features are also supported by this cable. Save yourself additional adapters or converters and use the DIGITUS® USB-C to HDMI adapter cable.

Outputs an HDMI signal in UHD 4K via the USB-C interface

- Supported resolution: 4K / 30 Hz (3840 x 2160p), 1080p@120Hz, 720p, 480p
- Data transfer rate: 5 Gbps
- USB version 3.1 Gen 1
- Supports 4K 3D, Full HD 3D HFR
- Supports ARC
- Supports YUV 4:4:4
- Supports HDCP 2.0
- Supports HDMI 1.4b
- Supported color depth: 12 bit
- Supports Consumer Electronic Control (CEC)
- Supports lip-sync (audio/video synchronization)
- Supports Multi Stream Audio/Video
- Supports 21:9 Cinemascope
- Supports 32 channel audio
- Supports 8-channel LPCM, 192 kHz, 24-bit audio capability
- Supports DTS-HD master audio bitstream
- Supports Super Audio CD (DSD)
- Supports DVD-Audio
- Supports Blu-Ray Disc and HD-DVD audio and video
- Supports EDID 2.0 (device detection)
- Supports DVI version 1.0

- Latency: Zero frame delay
- Power consumption: 250 mW max.
- Compatible operating systems: Windows 10/8/8.1/7, MacOS® (OS X), Android, Chromebook Pixel
- Operating humidity: 20% - 80% RH
- Operating temperature: -10°C ~ +50°C
- Length: 1.8 m
- Cable sheath: PVC
- Plug housing: Aluminum
- Dimensions: L 46 x 37.6 W x H 13.2 mm
- Weight: 62 g
- Manufacturer's instructions:
 - Your USB-C equipped device must support DisplayPort video mode (DP Alt Mode) to be compatible with this adapter/converter.
 - The video output capability depends on the graphics card of your notebook and the connected monitor. Some monitors also limit the available resolution.

Attributes


- AWG: 34
- Color cable: black
- Connector 1: USB C, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold-plated
- Ferrite filter: none
- HDTV Standard: Ultra HD 4K
- USB compliance: USB 3.0 / 3.1
- Length: 1.8 m
- Shielding: Double shielding

Package contents

- USB-C - HDMI video adapter cable, UHD 4K / 30 Hz

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	80	7.50	38.10	30.20	31.10	35,784.30
Packaging Unit Inside	10	0.94	22.50	15.00	15.00	5,062.50
Packaging Unit Single	1	0.09	22.50	15.00	1.50	506.25
Net single without Packaging	0	0.06	22.00	18.00	0.50	198.00

More images:

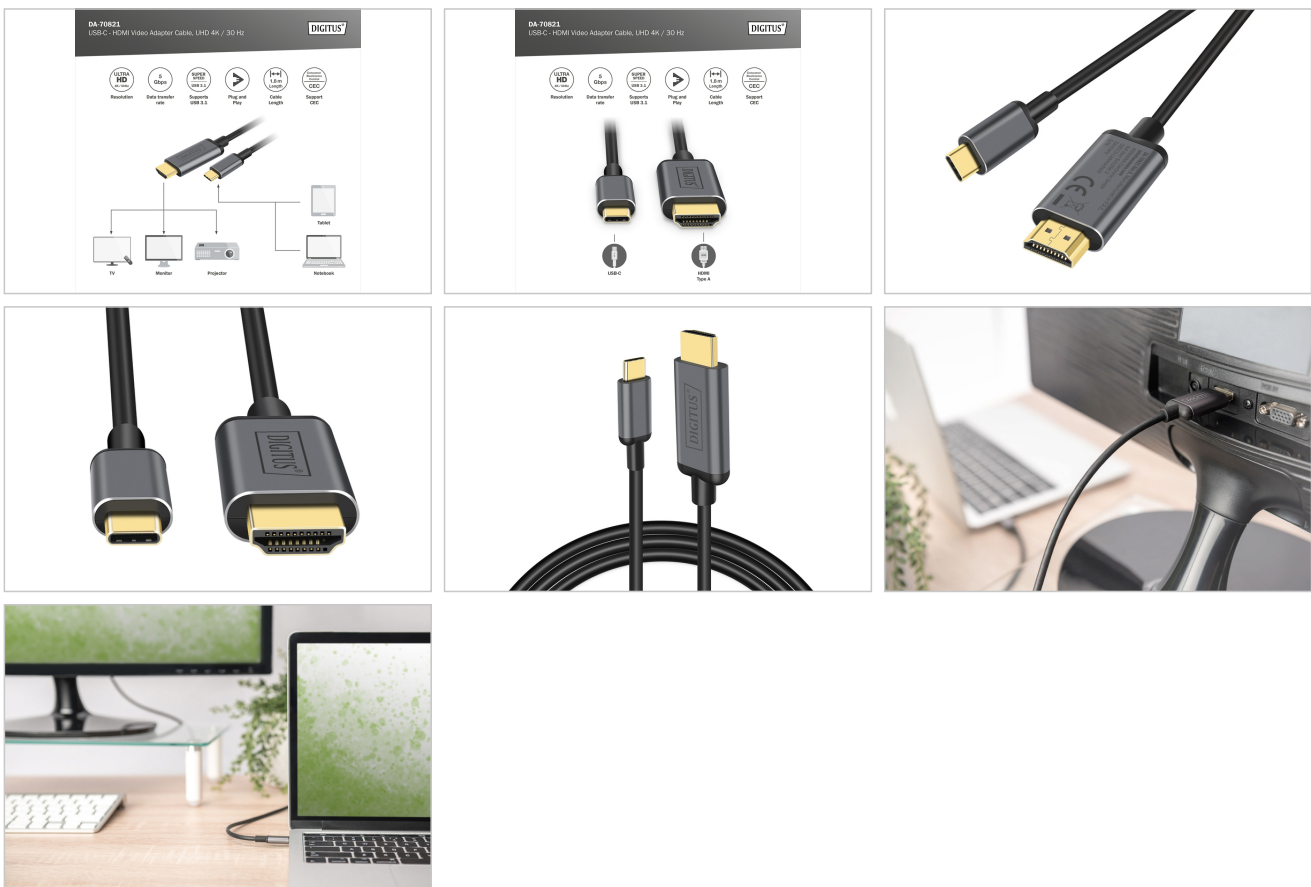

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com