


# DIGITUS® Active Mini DisplayPort Adapter / Converter, DP to HDMI

DB-340416-002-W  
EAN 4016032468769

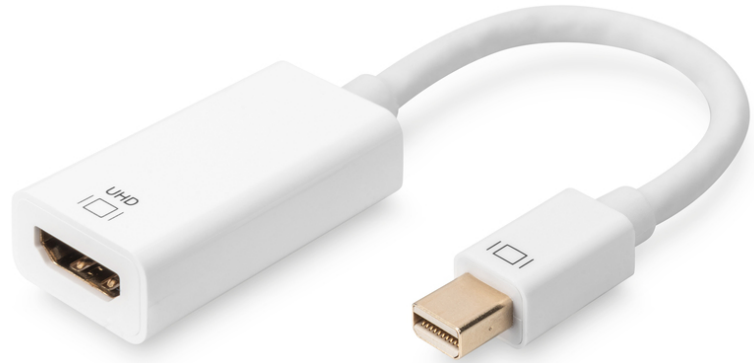

**DisplayPort Adapter Cable, Type mini DP - HDMI A M/F, 0.2m, UHD 4K, HDMI 2.0, active, gold, wh**

The 4K Mini DisplayPort to HDMI Adapter / Converter (Mini DisplayPort plug to HDMI jack) enables you to reproduce content from your computer or notebook directly onto your TV. It supports a resolution of up to 4096 x 2160p. Your images, videos, documents, presentations etc. can be displayed in Ultra HD and optimally presented during meetings or for private use.

**Converts Mini DisplayPort signals to HDMI signals up to 4K resolution**

- HDCP 1.3 compatible
- Maximal bandwidth: 21,6 Gbps
- HBR-Version/transfer mode: HBR2 (5,40 Gbit/s per lane)

**Attributes**

- AWG: 32

- Color cable: white
- Connector 1: Mini DP, plug
- Connector 2: HDMI type A, jack
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.2
- Ferrite filter: none
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Interlock: none
- Length: 0.2 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

**Package contents**

- 1 x Active Mini DisplayPort Adapter / Converter, DP to HDMI

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	80	7.20	52.00	29.00	39.00	58.81
Packaging Unit Inside	20	1.80	27.00	25.00	17.00	11.48
Packaging Unit Single	1	0.09	23.50	7.50	2.30	405.38
Net single without Packaging	0	0.09	2.46	0.45	1.50	1.66

**More images:**



**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)