


# DIGITUS® SC/UPC Fiber Optic Fast connector (10 Pieces)

DN-FC-9100

EAN 4016032486800

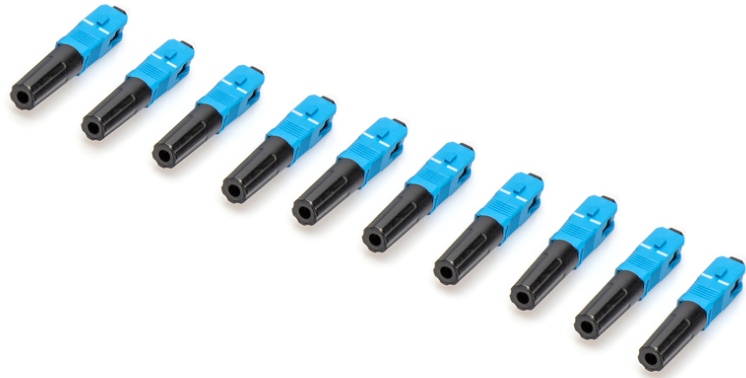

### Fiber Optic Fast Connector, SM SC/UPC 10 piece pack

The SC/UPC fast connectors are used to close optical cables and fast cross-connection, cable repair, various switching nodes in FTTH networks to form a continuous optical patch. They completely eliminate the need for hand polishing in the field. The mechanical splice technology ensures precise fiber alignment and offers an immediate low loss termination for single-mode optical fibers. The attenuation obtained does not exceed 0.3 dB. The connectors can be used in all optical networks where UPC type connector is required. It is suitable for optical cabling in primary/secondary/tertiary cabling and for use in FTTx networks.

**Fast connectors are designed to enable quick and easy termination of fibers in the field. For uncomplicated fast repair of existing installations as well as for new installations, e.g. for Fttx in-house cabling.**

- Connector Type : SC
- Polishing : UPC
- Fiber Mode : 9/125µm Singlemode
- Ferrule : Ceramic (2,5mm)
- Insertion Loss ≤0.2dB
- Return Loss ≥50dB
- Cable Diameters : 0.9/2.0/3.0mm
- Product colour : Black, Blue
- Storage Temperature : -40 to 85°C
- Operating Temperature : -20 to 75°C
- Dimension : 55mm long

### Package contents

- 10 x SC/UPC Fiber Optic Connector

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	2	10.10	26.00	32.00	46.00	38.27
Packaging Unit Inside	100	0.51	7.80	12.00	15.00	1.40
Packaging Unit Single	10	0.05	1.50	7.10	14.50	154.43
Net single without Packaging	0	0.00	56.50	1.00	1.00	56.50

**More images:**



**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)