

# DIGITUS DisplayPort Adapter / Converter

**AK-340400-001-S**  
**EAN 4016032289241**



## DisplayPort Adapter Cable, Type DP-HDMI A M/F, 0.15m,w/interlock, DP 1.1a comp., bl

This HD video and digital audio adapter / converter suits ideal to connect a notebook or computer with DP interface to a HDMI monitor, beamer, LCD/TFT monitor, LED or plasma TV with a HDMI cable, for example.

### Ensures a lower burden of the interface.

- Support up to 1080p with 60Hz
- Support DP++ Dual-Mode
- Maximal bandwidth: 6.75 Gbps
- HBR-Version/transfer mode: HBR1 (2,70 Gbit/s per lane)

### Attributes


- Assortment: DisplayPort Cables
- AWG: 28

- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: HDMI type A, jack
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- Ferrite filter: none
- HDTV Resolution max.: 1920 x 1080 Pixel, 60Hz
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: Snap fastener
- Packaging: Polybag
- Wire material: CU
- Length: 0.15 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

## Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	250	9.95	50.00	32.00	21.00	33,600.00
Packaging Unit Inside	10	0.40	40.60	40.60	6.60	10,879.20
Packaging Unit Single	1	0.04	11.50	9.50	21.00	2,294.25
Net single without Packaging	1	0.03	11.50	9.50	21.00	2,294.25

## More images:

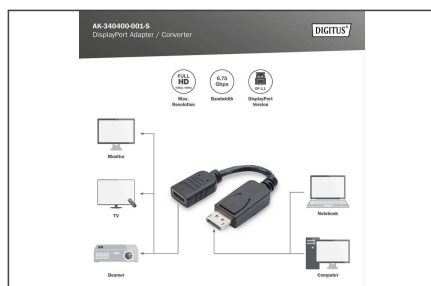

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)