

# DIGITUS® DisplayPort Connection Cable

DB-340100-020-S  
EAN 4016032292142



### DisplayPort Connection Cable, Type DP M/M, 2.0m, w/interlock, UHD 4K, DP 1.2, bl

This high performance HD digital audio and video cable for example is used to connect a PC or notebook with DisplayPort interface to a monitor with DisplayPort interface.

#### Save and reliable connection based on the snap fastener at connector

- Supported Video format: 4K/2K@24Hz, 4K/2K@30Hz or 4K/2K@60Hz
- Supported Video Resolution: 4096 x 2160p; 1920 x 1080p
- Maximal bandwidth: 21,6 Gbps
- HBR-Version/transfer mode: HBR2 (5,40 Gbit/s per lane)
- HDCP-Version: HDCP 1.3


#### Attributes

- Assortment: DisplayPort Cables

- AWG: 28
- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: DP, plug
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.2
- Ferrite filter: none
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Interlock: Snap fastener
- Wire material: CU
- Length: 2 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 40           | 1.10        | 56.00      | 29.00      | 39.00       | 63,336.00       |
| Packaging Unit Inside        | 10           | 0.28        | 27.00      | 27.00      | 17.00       | 12,393.00       |
| Packaging Unit Single        | 1            | 0.03        | 5.00       | 7.50       | 23.50       | 881.25          |
| Net single without Packaging | 1            | -0.02       | 5.00       | 7.50       | 23.50       | 881.25          |

**More images:**

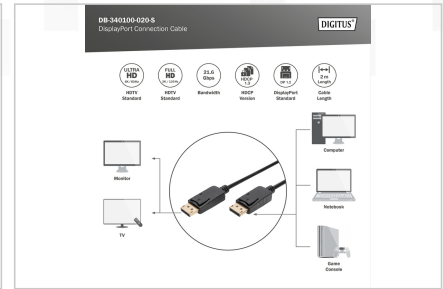

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)