

DIGITUS® CAT 6A U/FTP installation cable, 305 m, simplex, Eca

DK-1623-A-VH-305
EAN 4016032344124



CAT 6A U-FTP installation cable, 500 MHz Eca (EN 50575), AWG 23/1, 305 m drum, sx, blue

The Digitus® Cat.6A U/FTP installation cable is characterized by the following cable construction 4x2x AWG23/1 and reaches a transmission frequency up to 500 MHz. The halogen free cable jacket is conform to the standard IEC 60332-1, FRNC-B, LSZH-1 and CPR Euro class Eca. The cable is suitable for building structured cabling in the secondary and tertiary area. Compliant with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-10-1.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare copper wire, AWG 23/1
- System(s) for the assessment and verification of constancy of performance: System 3
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: Aluminum-laminated polyester film, covers 100%
- Outer sheath: Eca to B2ca in accordance with EN 50575; LSZH
- Outer sheath thickness (nominal): 0.5 mm (Eca); 0.6 mm (Dca); 0.8 mm (Cca); 0.8 mm (B2ca)
- Outer casing color: Light blue (RAL 5012)
- Mechanical properties:
- Strain relief: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +60 °C


- Operating temperature range: -20 °C to +75 °C
- Installation temperature range: 0 °C to +50 °C
- Outer diameter: 7.0 mm (Eca); 7.2 mm (Dca); 7.6 mm (Cca); 7.6 mm (B2ca)
- Weight (kg/km): 56 kg (Eca); 57 kg (Dca); 58 (Cca); 58 kg (B2ca)
- Electrical properties:
- Impedance: 100±15 Ohm @ 4 - 100MHz; 100±25 Ohm @ 100-500 MHz;
- Capacitance: 45 pF/m nominal @ 1KHz
- Capacitance unbalance (pair-earth): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- Loop resistance: 190 Ohm/km max. (2% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 2
- Phase delay: 450 nS/100 m max.
- Time delay: 25 nS/100 m max.
- Separation class: "c" according to EN 50174-2
- NVP: 70%

Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 6A
- Shielding: U-FTP, pairs in metal foil
- CPR: Eca
- Length: 305 m
- Color: light-blue
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	17.15	37.00	37.00	29.00	39,701.00
Packaging Unit Inside	1	17.15	37.00	37.00	22.00	30,118.00
Packaging Unit Single	1	17.15	37.00	37.00	29.00	39,701.00
Net single without Packaging	1	16.97	37.00	37.00	29.00	39,701.00

More images:

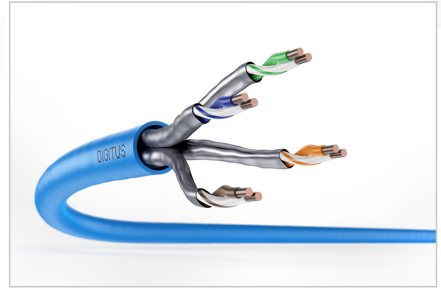

DIGITUS

AWG 23/1
500 MHz
10 Gbit Ethernet
CAT 6a
LSZH
Eca
CPL class

CAT 6a U/FTP Installation Cable, 305 m, Simplex, E_{ca}

DIGITUS

DK-1623-A-VH-305 // CAT 6a U/FTP Installation Cable, 305 m, Simplex, E_{ca}

Anwendungsbeispiel
Example of use

DIGITUS

DK-1623-A-VH-305 // CAT 6a U/FTP Installation Cable, 305 m, Simplex, E_{ca}

Kabelquerschnitt
Cable cross section

DIGITUS

Produktdaten / Product Information	Physikalische Spezifikationen / Physical Properties
Produktname: CAT 6a U/FTP Installation Cable, 305 m, Simplex, E _{ca}	Typ: CAT 6a U/FTP Installation Cable, 305 m, Simplex, E _{ca}
Produktcode: DK-1623-A-VH-305	Material: Polyethylene (PE) jacket, Copper-plated steel braid, PVC insulation
Produktbeschreibung: CAT 6a U/FTP Installation Cable, 305 m, Simplex, E _{ca}	Leistungsfähigkeit: 10 Gbit Ethernet, 500 MHz, AWG 23/1
Technische Spezifikationen: CAT 6a U/FTP Installation Cable, 305 m, Simplex, E _{ca}	Abmessungen: 10.5 mm diameter, 1.5 mm jacket thickness
Material: Polyethylene (PE) jacket, Copper-plated steel braid, PVC insulation	Temperaturbereich: -40°C to +75°C
Leistungsfähigkeit: 10 Gbit Ethernet, 500 MHz, AWG 23/1	Flammverhalten: LSZH (Low Smoke Zero Halogen)
Abmessungen: 10.5 mm diameter, 1.5 mm jacket thickness	Umweltverträglichkeit: RoHS compliant
Temperaturbereich: -40°C to +75°C	CE-Zertifizierung: CE, Eca, CPL class
Flammverhalten: LSZH (Low Smoke Zero Halogen)	RoHS: RoHS compliant
Umweltverträglichkeit: RoHS compliant	CE-Zertifizierung: CE, Eca, CPL class
CE-Zertifizierung: CE, Eca, CPL class	RoHS: RoHS compliant

DIGITUS

Leistungsfähigkeit / Performance Properties

Typ	AWG	NC	PS	MS	AWG	AWG	AWG	AWG	AWG	AWG	AWG
1	23	1	1	1	23	23	23	23	23	23	23
2	23	1	1	1	23	23	23	23	23	23	23
3	23	1	1	1	23	23	23	23	23	23	23
4	23	1	1	1	23	23	23	23	23	23	23
5	23	1	1	1	23	23	23	23	23	23	23
6	23	1	1	1	23	23	23	23	23	23	23
7	23	1	1	1	23	23	23	23	23	23	23
8	23	1	1	1	23	23	23	23	23	23	23
9	23	1	1	1	23	23	23	23	23	23	23
10	23	1	1	1	23	23	23	23	23	23	23

Intertek

ETL Verified Certificate of Conformance Number: 19422993CF-001

Product Description: CAT 6a U/FTP Installation Cable, 305 m, Simplex, E_{ca}

Approved by: Intertek

GHMT

Certificate No. 1988A-21

Zertifikat No. 1988A-21

Category 6e

Category 6e

GHMT Type Approval

DIGITUS

DIGITUS

EN 50521-3	Brandenklasse	Leistungsfähigkeit (MHz)	Anzahl der verdrillten Paare (AWG)	Zertifizierung
B2ca	Sehr hoch	1+	4	s
Cca	Hoch	1	4	d
Dca	Mittel	3	4	a
Eca	Gering	1	4	a

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com