


DIGITUS® CAT 6A Keystone module, unshielded

DN-93606

EAN 4016032366317

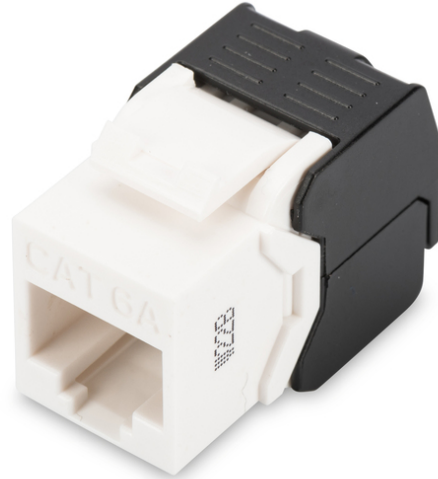

CAT 6A Keystone Jack, unshielded tool free connection

The "DN-93606" keystone module from DIGITUS® is unshielded and offers excellent performance and connection quality for your network with a tool-free mounting connection. Its compact design allows 24 units to be installed in series in 483 mm (19") 1U panels. It is compliant with Category 6A / 10GBase-T Channel, ANSI/EIA/TIA 568C.2.1:2002, ISO/IEC 11801:2002.

- Transmission characteristics: Category 6A, class EA
- Application areas: Up to 500 MHz, 10GBase-T
- Suitable for IEEE 802.3 af/at/bt - PoE, PoE+ & 4PPoE (in permanent link)
- General properties:
- Suitable for 483 mm (19") rack mounting
- RJ45 sockets, 8P8C
- Cable installation via LSA strips, color-coded according to EIA/TIA 568 A & B
- Cable fixation by means of quick latches
- Tool-free mounting connection
- Technical features:
- RJ45 socket material: ABS UL 94V-0



- Contact RJ45 socket: Nickel-plated phosphor bronze, 0.5 mm gold-plated contact
- LSA cutting clamp: Krone LSA+, UL 94V-2, galvanized phosphor bronze
- Printed circuit board: FR4, UL 94V-0
- Physical properties:
- Insertion force: 30N max. (IEC 60603-7-5)
- Tensile load: 7.7 kg between socket and plug
- Operating temperature: -20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)
- Socket mating cycle: > 750 acc. to ISO/IEC 11801, IEC 60603-7-5
- Terminal: > 200 acc. to ISO/IEC 11801, IEC 60603-7-5
- Core receptacle: 22-26 AWG solid and stranded conductors
- Insulation resistance: > 500 MOhm
- Contact resistance: < 20 milliOhms
- Dielectric strength: 1000 VDC (contact/contact), 1500 VDC (contact/ground)

Attributes

- Category: CAT 6A

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	250	3.80	53.00	33.00	22.00	38,478.00
Packaging Unit Inside	25	0.38	10.00	20.00	14.00	2,800.00
Packaging Unit Single	1	0.02	2.00	8.00	10.00	160.00
Net single without Packaging	1	0.01	2.00	8.00	10.00	160.00

More images:

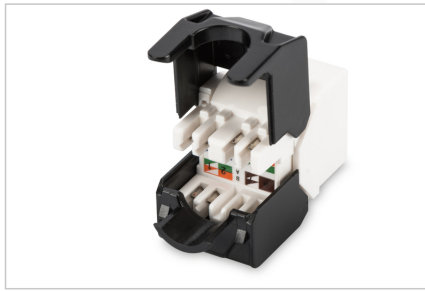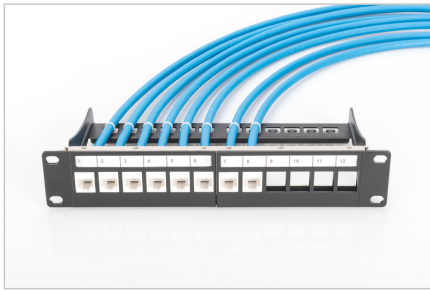

Safety notes

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com