


DIGITUS® CAT 6A U/UTP installation cable, 500 m, simplex, B2ca

DK-1616-A-VH-5

EAN 4016032441977

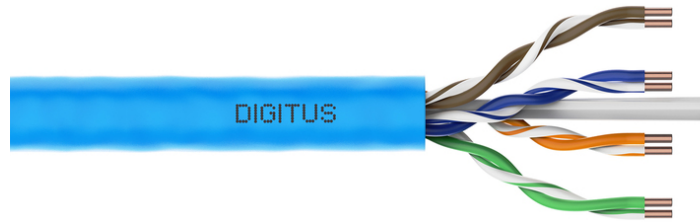

CAT 6A U-UTP installation cable, 500 MHz B2ca (EN 50575), AWG 23/1, 500 m drum,

DIGITUS® Category 6A U-UTP installation cables are manufactured and tested to the ISO/IEC 11801, TIA/-586-C.2 and EN 50173 Category 6A specifications. Every cord consists of 8 color coded AWG 23 polyethylene insulated conductors. The conductors are twisted together to form 4 pairs with varying lay lengths. Printing details along the outer sheath includes the brand name and item code. The cable is packed in a paper pullout box which makes the installation easy.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, olid AWG 23/1
- Insulation: HD-PE (High Density Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shield: None
- Overall shielding: None
- Outer sheath: Dca to B2ca acc. to EN 50575; LSZH
- Outer sheath diameter (nominal): 0,5 mm (Eca); 0,6 mm (Dca); 1,2 mm (Cca); 1,4 mm (B2ca)
- Outer sheath color: Light blue (RAL 5012)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C




- Operating temperature range: -20 °C up to +75 °C
- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 7,1 mm (Eca); 7,3 mm (Dca); 7,4 mm (Cca); 7,6 mm (B2ca)
- Weight (kg/km): 53 kg (Eca); 54 kg (Dca); 55 kg (Cca); 56 kg (B2ca)
- Electrical properties:
- Impedance: 100±50hm @ 1 - 600MHz
- Capacitance: 40 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 147 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 2
- Signal propagation delay: 450 nS/100 m max.
- Propagation delay: 10 nS/100 m max.
- Separating class: "c" acc. to EN 50174-2
- NVP: 70%

Attributes

- Category: CAT 6A
- Shielding: U-UTP, unshielded
- CPR: B2ca
- Length: 500 m
- Color: light-blue
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	28.00	50.00	50.00	22.00	55,000.00
Packaging Unit Inside	1	28.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	28.00	50.00	50.00	22.00	55,000.00
Net single without Packaging	1	27.84	50.00	50.00	22.00	55,000.00

More images:

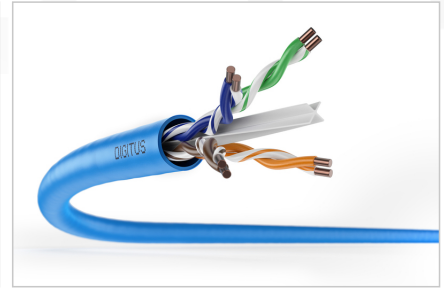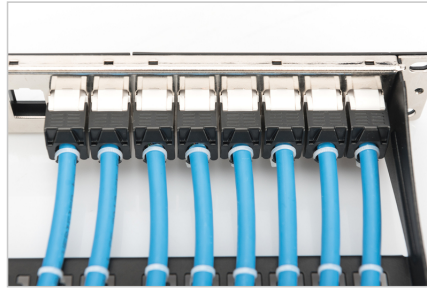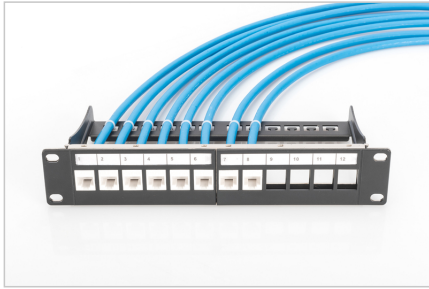

DIGITUS

AWG 23/1
500 MHz
10 Gbit Ethernet
20°/75°
LSZH
D Ca
Cat 6a
CPL class

CAT 6a U/UTP Installation Cable, 500m, Simplex, D_{Ca}

DIGITUS

DK.1614-A-VH-S // CAT 6_a U/UTP Installation Cable, 500m, Simplex, D_a

Anwendungsbeispiel
Example of use

DIGITUS

DK.1614-A-VH-S // CAT 6_a U/UTP Installation Cable, 500m, Simplex, D_a

Kabelquerschnitt
Cable cross section

DIGITUS

Produktdatenblatt / Product Information	Physikalische Spezifikationen / Physical Properties
Identifikations- / Identification: Hersteller / Manufacturer: ASSMANN Electronic GmbH, Lüdenscheld, Germany Produkt / Product: CAT 6a U/UTP Installation Cable Artikelnummer / Article number: DK.1614-A-VH-S EAN: 40 100 00 1614 1	Material / Material: Kabel / Cable: Polyethylene (PE) jacket, PVC insulation Kabelquerschnitt / Cable cross-section: 10 x 0.5 mm² (23 AWG)
Technische Eigenschaften / Technical Properties: Kategorie / Category: CAT 6a Leistungsfähigkeit / Performance: 10 Gbit Ethernet Temperaturbereich / Temperature range: -20°C to +75°C LSZH (Low Smoke Zero Halogen)	Elektrische Eigenschaften / Electrical Properties: Impedanz / Impedance: 100 Ω Dämpfung / Attenuation: 1.5 dB/100m @ 100MHz Kabelverlust / Cable loss: 0.5 dB/100m @ 100MHz Kabelkapazität / Cable capacitance: 50 pF/m Kabelinduktivität / Cable inductance: 0.5 nH/m
Mechanische Eigenschaften / Mechanical Properties: Biegeradius / Bend radius: 25 mm Zugkraft / Tensile strength: 100 N Zugkraft / Tensile strength: 100 N Zugkraft / Tensile strength: 100 N	Mechanische Eigenschaften / Mechanical Properties: Zugkraft / Tensile strength: 100 N Zugkraft / Tensile strength: 100 N Zugkraft / Tensile strength: 100 N

DIGITUS

Leistungsgrenzen / Performance Limits

Temperaturbereich / Temperature range	AWG 23	AWG 24	AWG 25	AWG 26	AWG 27	AWG 28	AWG 29	AWG 30
0°C	1.5	1.7	1.9	2.1	2.3	2.5	2.7	2.9
23°C	1.5	1.7	1.9	2.1	2.3	2.5	2.7	2.9
40°C	1.5	1.7	1.9	2.1	2.3	2.5	2.7	2.9
55°C	1.5	1.7	1.9	2.1	2.3	2.5	2.7	2.9
70°C	1.5	1.7	1.9	2.1	2.3	2.5	2.7	2.9
85°C	1.5	1.7	1.9	2.1	2.3	2.5	2.7	2.9
100°C	1.5	1.7	1.9	2.1	2.3	2.5	2.7	2.9

Compliance Statement No. 2020-530

Hersteller / Manufacturer: ASSMANN Electronic GmbH, Lüdenscheld, Germany

Produkt / Product: CAT 6a U/UTP Installation Cable

CE, RoHS, REACH, Intertek, ETL

DIGITUS

Leistungsmerkmale / Performance Features

CAT 6.2, CAT 7, CAT 7 S/FTP, CAT 8, CAT 9


DIGITUS

Leistungsgrenzen / Performance Limits

Temperaturbereich / Temperature range: 0°C to 100°C

Leistungsfähigkeit / Performance: 10 Gbit Ethernet

Temperaturbereich / Temperature range: -20°C to +75°C

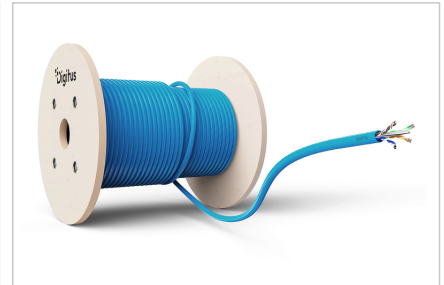

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheld, Germany
<https://www.assmann.com>
info@assmann.com