

# DIGITUS® USB-C 4 Gen2- USB-C connection cable, 3m

DB-300443-030-S

EAN 4016032485889



## USB4 Gen2 connection cable, TypeC to TypeC, Al-Hous. PP Braid 8K@30Hz, 4K@60Hz, PD3.0, 20Gbits/s, 3m, bl.

The Digitus® 3rd generation USB 4.0 cable with aluminum housing is the all-rounder among cables. Thanks to the Thunderbolt 3 protocol, PCI Express, DisplayPort and host-to-host transmissions can be realized. You can use this cable to transfer audio/video signals, data and power. The data transfer speed is 20 Gbit/s, which is 4x faster than USB 3.0 (5 Gbit/s) and 2x faster than USB 3.1 (10 Gbit/s). This allows you to transfer large data such as movies and music within seconds. The video signals are transmitted in max. 8K at a refresh rate of 30 Hz. In addition, the resolutions 8K (7680 × 4320) @30Hz. (dual mode possible) and 4K (3840 × 2160) @60Hz are also supported. Thanks to USB Power Delivery Revision 3.0, the fast charging function is guaranteed. With the corresponding charger, you can charge your smart devices with max. 60 W (3 A / 20 V) in a short time. The USB Type-C interface enables broad compatibility with devices with this connection.

### The USB4 Gen2 cable is an all-rounder and supports the following transmission types: audio/video/data transfer/charging function

- Supports: 8K (7680 × 4320) @30Hz.
- Supports: 4K (3840 × 2160) @60Hz
- Supports data transfer rates of up to 20 Gbit/s
- Backwards compatible with Thunderbolt 3, USB 3.2, USB 3.1 and USB 2.0
- Supports USB Power Delivery Revision 3.0 (PD 3.0) with 20V, 3A and 60W
- Core material: CU
- Connection 1: USB type C, plug
- Connection 2: USB type C, plug
- Dimension plug 1: 6.65\*2.4mm
- Dimension plug 2: 6.65\*2.4mm
- Color connections: Black
- Contact surface: gold-plated
- Number of PINS: 22

- Hood: potted
- Cable outer material: PP
- Plug housing: Aluminum
- Cable outer diameter: 5.0 mm
- Tensile strength: 4 kg/min
- AWG: 30
- Bending radius: 60
- Cable color: Black
- Shielding: Double shielded
- USB-C product: yes
- Total weight: 45g
- Manufacturer's instructions:
- If you connect a USB-C monitor/TV/projector to a PC equipped with USB Type-C, please make sure that your USB-C display supports DisplayPort signal output.
- The video output capability depends on the graphics card of your notebook and the connected monitor. Some monitors also limit the available resolution.
- To use a dual 4K output, the USB 4 device must support the PD3.0 protocol

### Attributes


- AWG: 32
- Color cable: black
- Connector 1: USB C, plug
- Connector 2: USB C, plug
- Connector surface: gold-plated
- Ferrite filter: none
- USB compliance: USB 4.0
- Length: 3m
- Shielding: Double shielding

### Package contents

- 1x USB 4.0 Type-C connection cable

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	40	8.02	36.00	26.00	42.00	39,312.00
Packaging Unit Inside	20	4.01	17.00	24.00	41.00	16,728.00
Packaging Unit Single	1	0.20	8.00	23.00	4.00	736.00
Net single without Packaging	1	0.12	8.00	23.00	4.00	736.00

More images:

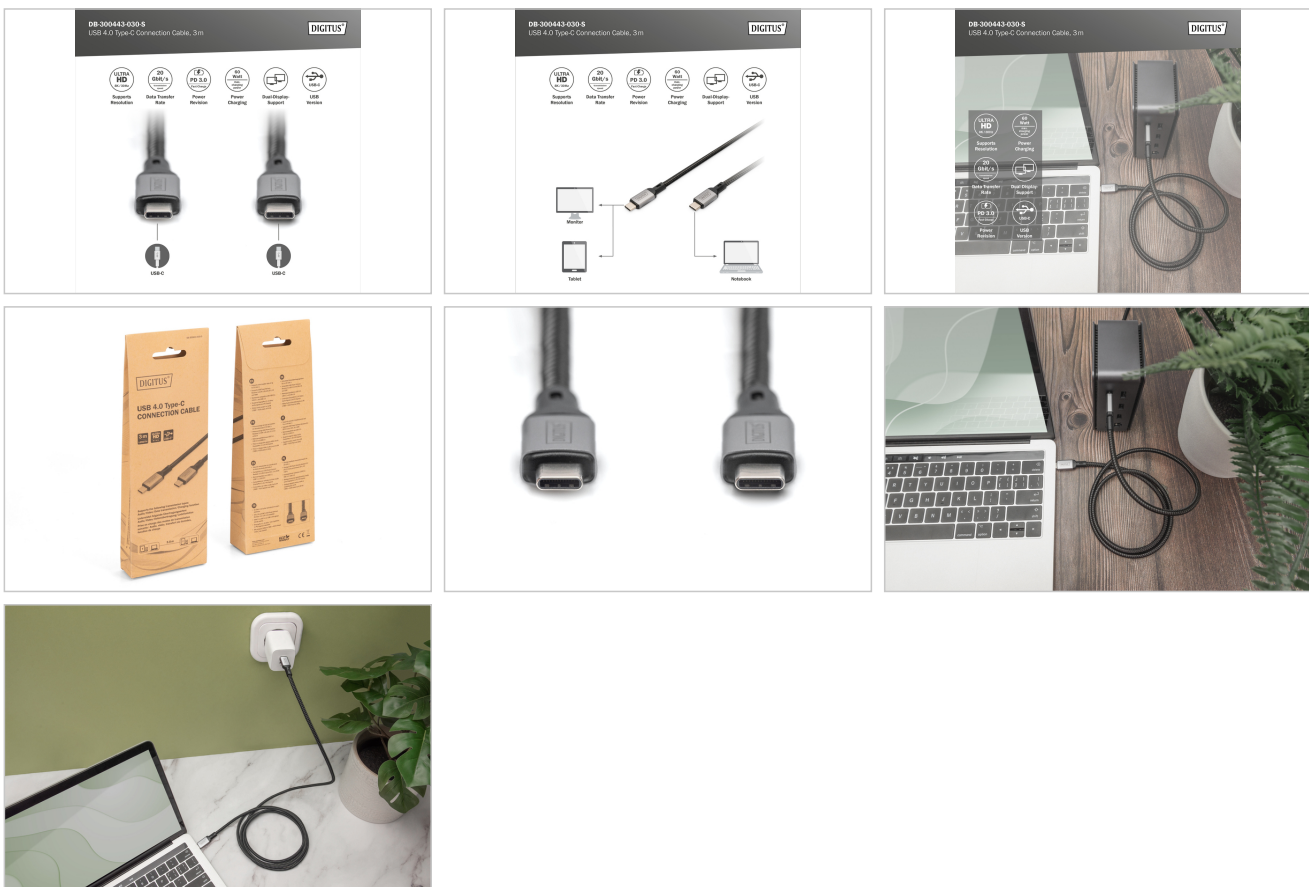

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)