


DIGITUS 25G DAC Cable SFP28 4m

DN-81244

EAN 4016032478829

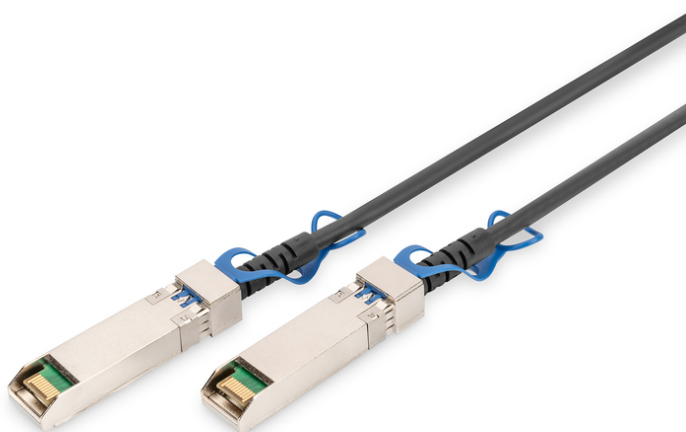

DAC Cable SFP28 4 M DAC Cable 25 G 4m

DIGITUS® 25G SFP28 Passive Direct-Attach Copper Twinax Cable are a high-performance, energy-saving, short-range connectivity solution 25G Ethernet application, switches, high performance computer, data storage arrays and telecom system. It consists of a shielded twinax copper cable with pluggable connectors on either end. Passive DAC cable have no electrical components built into the cable assembly and recommend for short transmission distance. Typically 1~2m and max. 5m lengths.

It is suitable for short reach connection between two SFP28 ports in 25G interconnecting networking applications.

- Number of Lanes : Tx & Rx
- Connector Type: SFP28 to SFP28
- Channel Data Rate: 25.88243 Gbps
- Operating Temperature: 0 to +70°C

- Storage Temperature: -40 to +85°C
- Supply Voltage: 3.3V nominal
- Power consumption less than 0.5W
- Compliant with MSA SFP28
- Electrical Interface: 20 pins edge connector
- Management Interface: Serial, I²C
- Connector is compatible with SFF-8432 specification
- Compatible with Allnet, CISCO, 3COM, D-LINK, Dell, Edimax, Etherwan, ENTERASYS, EXTREME, FINISAR, FORCE 10, Fortinet, HUAWEI, IBM, JUNIPER, LINKSYS, NETGEAR, NORTEL, RIVERSTONE, ZTE, ZYXEL

Attributes

- DDM Support: no

Package contents

- SFP28 25G DAC cable 4 m

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	90	15.00	48.00	48.00	38.00	87,552.00
Packaging Unit Inside	1	0.17	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.17	26.00	26.00	4.00	2,704.00
Net single without Packaging	1	0.21	5.80	1.40	1.10	0.00

More images:



Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com