


DIGITUS Cabo de ligação HDMI High Speed com Ethernet

AK-330107-020-S
EAN 4016032290957

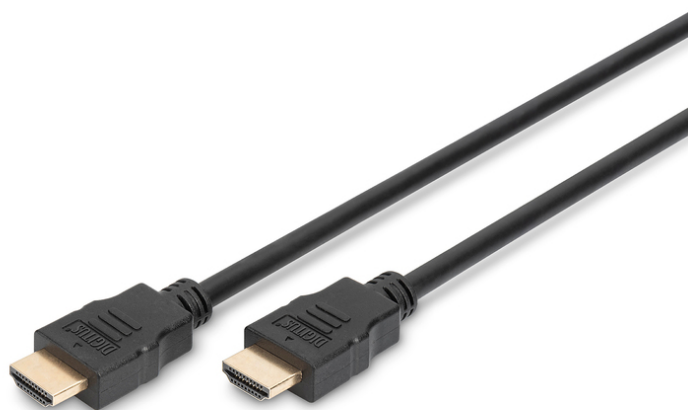

HDMI High Speed connection cable, type A M/M, 2.0m, Ultra HD 60p, gold, bl

Este cabo HD compatível com 3D serve para a ligação de equipamentos áudio/vídeo, como, por exemplo, leitores Blu-ray, consolas de jogo, entre outros, a um televisor, monitor ou computador. Também se adequa a qualquer aplicação com base em IP.

Compatível com 4K Ultra HD e 3D + ligação Ethernet

- Suporta até 4K Ultra HD/ 60Hz
- Suporta 3D
- Suporta Canal de Retorno Áudio (ARC)
- Suporta Controlo Eletrónico do Consumidor (CEC)
- Suporta Lip-Sync (sincronização áudio/vídeo)
- Compatível com DolbyTrueHD
- Suporte de transmissão em sequência múltipla de áudio/vídeo
- Suporte de Cinemascope 21:9
- Suporte de 32 canais áudio
- Com canal Ethernet (HEC)


- Com canal Ethernet (HEC)

Attributes

- Assortment: HDMI Cables
- AWG: 30
- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold-plated
- HDMI Standard: High Speed HDMI with Ethernet
- HDTV Resolution max.: 3840 x 2160 Pixel, 60Hz
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Packaging: Polybag
- Wire material: CU
- Length: 2 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	120	12.80	45.00	32.00	25.00	36,000.00
Packaging Unit Inside	5	0.53	5.00	44.00	44.00	9,680.00
Packaging Unit Single	1	0.11	25.00	17.00	2.00	850.00
Net single without Packaging	1	0.09	17.00	13.00	3.00	0.00

More images:

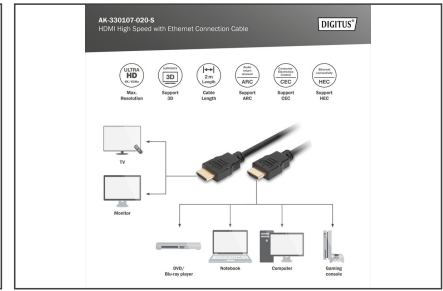

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com