

Digitus® CAT 6 U/FTP Slim patch cord

DK-1624-015S

EAN 4016032467878



CAT 6 U-FTP slim patch cord, Cu, LSZH AWG 28/7, length 1.5 m, color grey

DIGITUS® slim patch cords are characterised by their small outer diameter and flexible sheath. Slim design enables versatile use in your network. Moreover, the DIGITUS® Category 6 Class E patch cords are manufactured and tested to the ISO/IEC 11801 and DIN EN 50173 Category 6 specifications. They will guarantee the installed cabling system is compliant with the ISO & EN channel specification requirements and will provide optimum performance levels of DIGITUS® Category 6 cabling. The performance is tested up to 250 MHz inclusive performance characteristics such as near end cross talk (“NEXT”). DIGITUS® patch cords are designed and produced to fulfill the highest requirements of various application areas in full volume. Each cable is fitted with a molded boot which comes with kink protection and strain relief. Furthermore the boot is equipped with a latch protection that prevents the latching lever against breaking. You can easily identify the Category 6, because of the transparent red colored connector.

Enables flexible and space-saving cabling in your network

- 2x RJ45 connectors (8P8C)
- Covers with kink protection, strain relief and latch protection



- Length indication on hoods
- Inner conductors: Copper (Cu)
- Anti-kink sleeve: molded-on
- Connector 1 type: RJ45 8(8)
- Connector 2 type: RJ45 8(8)
- Flame retardant version: yes
- Latch protection: yes
- NVP value: 76
- Oil resistant to EN 60811-404: no
- Bending radius: 4D (outer diameter x 4)

Attributes

- Configuration: 1:1
- Category: CAT 6
- Shielding: U-FTP, pairs in metal foil
- Length: 1.5 m
- Color: grey
- Jacket: LSOH
- Slim Version: yes
- Structure: 4 x 2 AWG 28/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	150	9.40	46.00	33.00	28.00	42,504.00
Packaging Unit Inside	10	0.63	10.30	25.00	30.00	7,725.00
Packaging Unit Single	1	0.06	1.60	14.00	25.00	560.00
Net single without Packaging	1	0.05	150.00	1.20	1.30	0.00

More images:

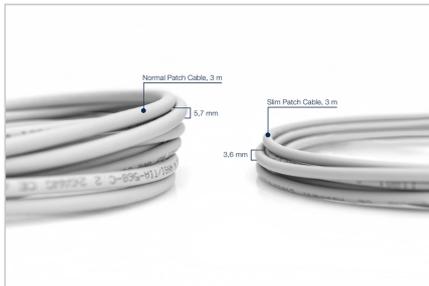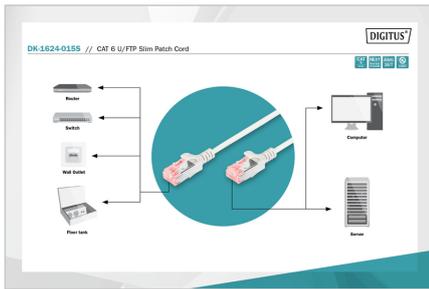

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH

Auf dem Schüffel 3

Lüdenscheid, Germany

<https://www.assmann.com>

info@assmann.com