


# DIGITUS 4K HDMI High-Speed Connecting Cable, Type A

DB-330113-030-S  
EAN 4016032468820

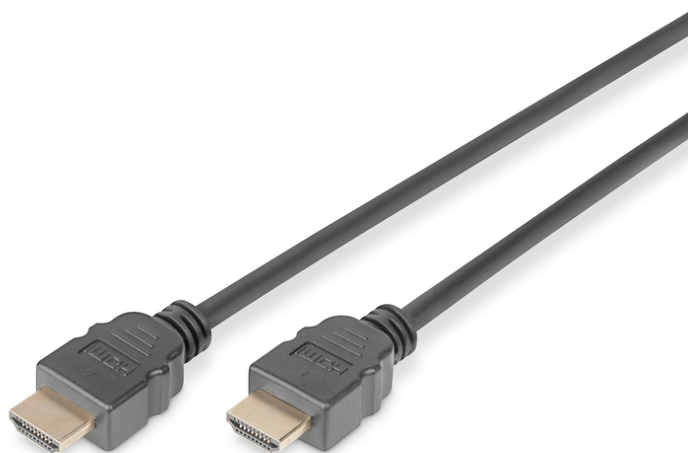

## HDMI Premium High Speed Connection Cable, Type D-A M/M, 3.0m, w/Ethernet, Ultra HD, 4K@60Hz, gold, bl

This high speed HDMI cable supports all current requirements – from the transmission of high-resolution UHD 4K content, also in 3D, or two-way audio transmission (ARC) and control of HDMI devices via CEC. Internet applications can also be used via the HDMI cable without needing to connect an additional Ethernet cable. Lip Sync means that delayed lip movement is a thing of the past. This cable can also be used to transmit up to 32 audio channels and enjoy image output in 21:9 CinemaScope format. Get more out of your Blu-ray player, gaming console or HD streaming portal. Gold-plated contacts and double shielding of the cable ensure maximum conductivity and interference-free transmission.

### 4K/Ultra HD and 3D-enabled + Ethernet connectivity

- Supports up to 4K with 60Hz
- Supports Ultra HD, 4096x2160p resolution
- With Ethernet channel (HEC)

- Backwards-compatible with HDMI 1.0, 1.1, 1.2, 1.3, 1.4

### Attributes



- AWG: 30
- Color cable: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, jack
- Connector surface: gold-plated
- Ferrite filter: none
- HDMI Standard: High Speed HDMI with Ethernet
- HDTV Resolution max.: 3840 x 2160 Pixel, 60Hz
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Length: 3 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

### Package contents

- 1 x 4K HDMI High-Speed Connecting Cable, Type A

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	9.30	54.00	34.00	30.00	55,080.00
Packaging Unit Inside	10	2.33	26.00	16.00	28.00	11,648.00
Packaging Unit Single	1	0.23	23.50	7.50	5.00	881.25
Net single without Packaging	1	0.23	23.50	7.50	5.00	0.00

**More images:**

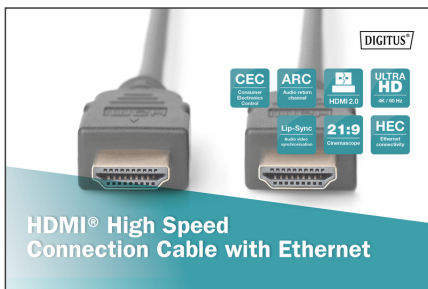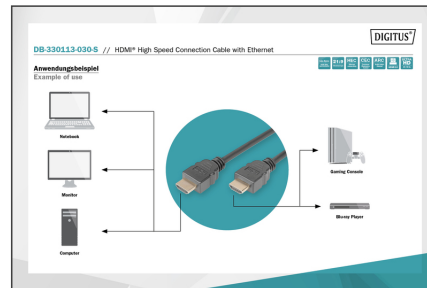

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)