


DIGITUS Network Set - 254 mm (10") - 6U, 312 x 300 mm (W xD)

DN-10-SET-1
EAN 4016032455363

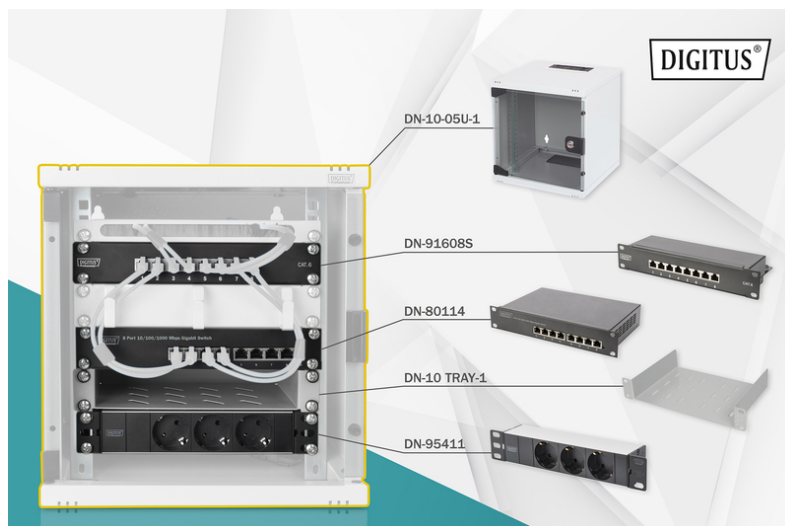

10 inch network bundle, including 6U cabinet, grey shelf, PDU, 8-port switch, CAT 6 patch panel

Whether for private areas, office or sub-distribution units with limited space: With the compact 254 mm (10") solutions, you can install your network wherever you like. The wall housings available in three rack units (6 rack units, 9 rack units, 12 rack units) are supplemented in these network sets by perfectly coordinated components to ensure fast and easy usability of IT cabling. The network cabinet and relevant accessories (such as switch, patch panel, socket strip, shelf, cable guidance panel, patch cable, etc.) are delivered in a compact box.

Complete set to build up a compact 254 mm (10") network incl. cabinet, shelf, power strip, switch, patch panel

- Wall housing dimensions (H x W x D): 330 x 312 x 300 mm
- Power strip with 3 safety plug sockets 250VAC 50/60Hz / 16A / 1000W
- Power strip with 2 m mains cable H05VV-F 35 1.5 mm² with safety plug sockets
- Switch complies with network standards IEEE 802.3, IEEE 802.3u, IEEE 802.3ab and IEEE 802.3x
- Patch panel for applications up to 250 MHz, 1GBase-T

- Cable installation on patch panel via LSA rails, color coded in accordance with EIA/TIA 568 A & B


Attributes

- Cabinet type: Wall mounting cabinet
- Color: light grey, RAL 7035
- Depth: 300 mm
- Front door: Glass door, single opening
- Load capacity: 30 kg
- Side panels: Both sides
- Units: 6
- Width: 312 mm
- IP protection class: IP20
- Mounted: yes

Package contents

- 1x wall mounting cabinet
- 1x shelf
- 1x power strip
- 1x network switch
- 1x patch panel
- 2x keys

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	9.50	36.00	35.00	40.00	50,400.00
Packaging Unit Inside	1	9.50	36.00	35.00	40.00	50,400.00
Packaging Unit Single	1	9.50	36.00	35.00	40.00	50,400.00
Net single without Packaging	1	8.86	30.00	31.20	33.00	0.00

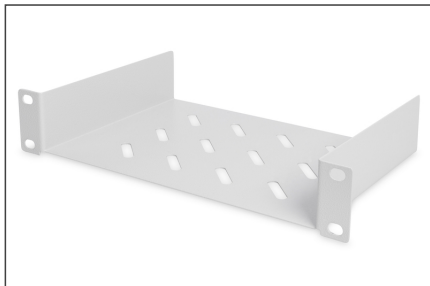More images:**Safety notes**

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be neatly routed and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com